



Ortac is pleased to present EMC EX-Proof UAGT Series Cable Glands

UAGT Series secure your connections and help prevent explosion in all hazardous areas involved with electrical application.

It takes all measures intrinsically, secures your connections against any leaking dangers. UAGT series cable glands also facilitate high level endurance and prevent earring in the mechanism of cable connection into the entry, under international standarts while being cared for safety connections in hazardous areas.



Type	: UAGT Screened EMC Ex gland
Protection code	: I M2 Ex db I Mb / I M2 Ex eb I Mb II 2G Ex db IIC Gb II 2G Ex eb II Gb II 2D Ex tb IIIC Db
Certificate	: IEP 14 ATEX 0217X
Material	: MS58 Brass with or without nickel plated Stainless steel AISI303 / 316L / Aluminium
Earthing Cone	: MS58 Brass with or without nickel plated & Ring
Standards	: EN 60079-0:2012, 60079-7:2007, 60079-1:2007 60079-31:2009
Protection class	: IP68
Temperature	: -30 °C +120 °C NBR -40 °C +100 °C NEOPRENE -60 °C +180 °C SILICONE -30 °C +100 °C TPE/V
Application area	: ZONE1, ZONE2, ZONE21, ZONE22, Gas Group IIA, IIB, IIC
Cable type	: Screened lines & Screened cables

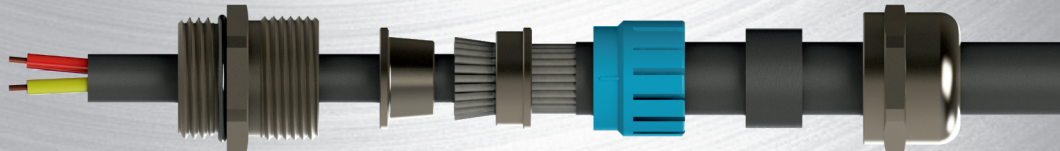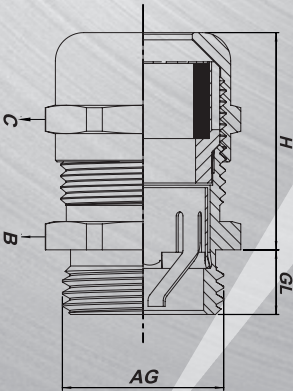

PRODUCT RANGE OVERVIEW

Exd

Product Size	Product Code	Standart AG	AG	GL min. mm	Clamping Range
16	UAGTXX/16/X	M16x1,5	3/8"	15	4-8
20	UAGTXX/20/X	M20x1,5	1/2"	15	6-12
25	UAGTXX/25/X	M25x1,5	3/4"	15	13-18
25s	UAGTXX/25s/X	M25x1,5	3/4"	15	10-14
32	UAGTXX/32/X	M32x1,5	1"	15	13-18
40	UAGTXX/40/X	M40x1,5	1"	15	18-25
40	UAGTXX/50/X	M40x1,5	1 1/4"	15	22-32
50	UAGTXX/50/X	M50x1,5	1 1/4"	15	22-32
50	UAGTXX/42/X	M50x1,5	1 1/2"	15	30-38
63s	UAGTXX/63s/X	M63x1,5	1 1/2"	15	33-44
63	UAGTXX/63/X	M63x1,5	2"	15	45-50
72	UAGTXX/80/X	M72x1,5	2"	20	50-63
75	UAGTXX/72/X	M75x1,5	2 1/2"	20	45-55
75	UAGTXX/75/X	M75x1,5	2 1/2"	20	50-63
80	UAGTXX/90/X	M80x1,5	3"	20	60-70

Exd

Product Size	Product Code	Standart AG	AG	GL min. mm	Clamping Range
16	EUAGTXX/16/X	M16x1,5	3/8"	7	4-8
20	EUAGTXX/20/X	M20x1,5	1/2"	8	6-12
25	EUAGTXX/25/X	M25x1,5	3/4"	8	13-18
25s	EUAGTXX/25s/X	M25x1,5	3/4"	8	10-14
32	EUAGTXX/32/X	M32x1,5	1"	9	13-18
32	EUAGTXX/40/X	M32x1,5	1"	9	18-25
40	EUAGTXX/40/X	M40x1,5	1"	9	18-25
40	EUAGTXX/50/X	M40x1,5	1 1/4"	9	22-32
50	EUAGTXX/50/X	M50x1,5	1 1/4"	9	22-32
50	EUAGTXX/42/X	M50x1,5	1 1/2"	9	30-38
63s	EUAGTXX/63s/X	M63x1,5	1 1/2"	14	33-44