


STOPPER PLUG

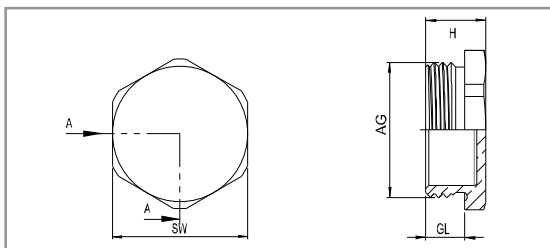

STOPPER PLUG

TECHNICAL DETAILS

- Type : TK TYPE STOPPER PLUG
- Protection code : I M2 Ex db I Mb / I M2 Ex eb I Mb II 2G Ex db IIC Gb / II 2G Ex eb II Gb II 1D Ex ta III C Da
- Certificate : IEP 15 ATEX 0333U
ATEX, ROHS, CE, PT, TUV
- Material : Brass, brass with nickel plated, stainless steel
- Standards : EN 60079-0 2012 /60079-1 2007/60079-7 2007 60079-31 2009
- O-ring : NBR / Silicone
- Protection class : IP66-IP68
- Application area : ZONE1 , ZONE 2, ZONE 21 , ZONE 22
Gas groups IIA , IIB , IIC

PRODUCT RANGE OVERVIEW

Product Size	Product Code	GL min. mm	H mm	SW mm
M12 x 1,5	TK-XX-M12	15	22	17
M16 x 1,5	TK-XX-M16	15	22	22
M20 x 1,5	TK-XX-M20	15	22	24
M25 x 1,5	TK-XX-M25	15	22	30
M32 x 1,5	TK-XX-M32	15	22	36
M40 x 1,5	TK-XX-M40	15	22	45
M50 x 1,5	TK-XX-M50	15	22	55
M63 x 1,5	TK-XX-M63	15	22	70
M75 x 1,5	TK-XX-M75	15	22	80
M90 x 2	TK-XX-M90	20	27	95
M100 x 2	TK-XX-M100	20	27	110
NPT 1/4"	TK-XX-N14	15	22	15
NPT 3/8"	TK-XX-N38	15	22	20
NPT 1/2"	TK-XX-N12	15	22	24
NPT 3/4"	TK-XX-N34	15	22	27
NPT 1"	TK-XX-N100	15	22	35
NPT 1 1/4"	TK-XX-N114	18	25	45
NPT 1 1/2"	TK-XX-N112	18	25	50
NPT 2"	TK-XX-N200	18	25	65
NPT 2 1/2"	TK-XX-N212	28	35	75
NPT 3"	TK-XX-N300	28	35	90
NPT 4"	TK-XX-N400	28	35	115
G 1/4"	TK-XX-G14	15	22	18
G 3/8"	TK-XX-G38	15	22	22
G 1/2"	TK-XX-G12	15	22	25
G 3/4"	TK-XX-G34	15	22	32
G 1"	TK-XX-G100	15	22	38
G 1 1/4"	TK-XX-G114	15	22	45
G 1 1/2"	TK-XX-G112	15	22	55
G 2"	TK-XX-G200	15	22	65
G 2 1/2"	TK-XX-G212	20	27	85
G 3"	TK-XX-G300	20	27	95
G 4"	TK-XX-G400	20	27	120
PG7	TK-XX-P7	15	22	17
PG9	TK-XX-P9	15	22	20
PG 11	TK-XX-P11	15	22	25
PG 13,5	TK-XX-P13	15	22	25
PG16	TK-XX-P16	15	22	27
PG21	TK-XX-P21	15	22	35
PG29	TK-XX-P29	15	22	42
PG36	TK-XX-P36	15	22	55
PG42	TK-XX-P42	15	22	60
PG48	TK-XX-P48	15	22	65