TACFLEX FLEXIBLE CONDUITS - Steel wire over braiding

tacflex

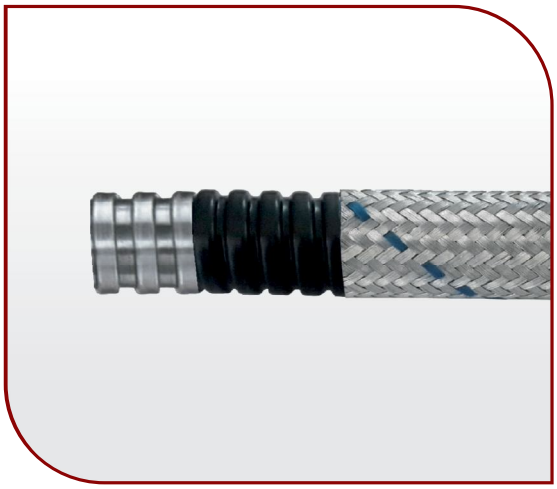

FLEXIBLE SPIRAL CONDUITS
STEEL WIRE OVER BRAIDING
PVC COATED

TECHNICAL DETAILS

Material	: Galvanised steel PVC coated galv. steel
Certificates	ROHS, CE, PT, TUV overbraid - stainless steel overbraiding version is available on request
Protection class	: IP65
Temperature range	: -15 °C +70 °C

Properties
High impact strength
Low fire hazard
Self-extinguishing
High abrasion resistance
EMC screening
Full-shrink packing



ÇELİK TEL ÖRGÜLÜ & PVC KAPLI METAL SPİRAL BORULAR

Hammaddesi	:	Galvaniz & kalay kaplı sac
1. kaplama	:	PVC
2. kaplama	:	Galvaniz / Paslanmaz çelik
PVC rengi	:	Siyah
Sürekli ısıya direnci	:	-15 °C + 70 °C
		Emc screen özelliği

PRODUCT RANGE OVERVIEW

Code	Size	d mm.	d1 mm.	Roll Length mt.
CTPS 9	1/4"	9	15	50
CTPS 10	1/4"	10	16	50
CTPS 11	3/8"	11	17	50
CTPS 13	3/8"	13	18,5	50
CTPS 16	1/2"	16	22	50
CTPS 21	3/4"	21	27	50
CTPS 26	1"	26	33	25
CTPS 35	11/4"	35	42	25
CTPS 40	11/2"	40	47	25
CTPS 51	2"	51	58	25