

WACG SINGLE COMPRESSION



INDUSTRIAL TYPE GLANDS




ARMoured CABLE GLANDS

WACG SERIES

TECHNICAL DETAILS

Type	: WACG (Single compression gland)
Certificates	: Gost-CE-Rohs-ISO9001-14001-Ohsas 18001 ROHS, CE, PT, TUV
Material	: MS58 Brass with or without nickel plated Stainless steel AISI303 / 316L / Aluminium
Standards	: EN 60079-0:2012, 60079-1:2007, 60079-31:2009; BS6121
Protection class	: IP66 / 68
Temperature	: -30 °C +120 °C NBR : -40 °C +100 °C NEOPRENE : -60 °C +180 °C SILICONE
Cable type	: -30 °C +100 °C TPE/V (STA & other cables optional) : SWA (Single wire armour)

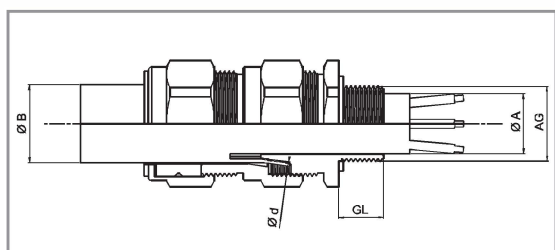

PRODUCT RANGE OVERVIEW

Product Size	Product Code	Standard AG	AG NPT	AG	A Min	B Min	B Max	Ø d (Armour) Min	Ø d (Armour) Max	GL mm	 mm
16	WACGXX-16-X	M16x1,5	1/2"	PG9	8,6	6,1	13,2	0,8	1,0	15	24
20ss	WACGXX-20ss-X	M20ssx1,5	1/2"	PG11ss	8,6	6,1	13,2	0,8	1,0	15	24
20s	WACGXX-20s-X	M20sx1,5	1/2"	PG11s	11,6	9,5	15,9	0,8	1,25	15	24
20	WACGXX-20-X	M20x1,5	1/2"	PG13,5	13,9	12,5	20,9	0,8	1,25	15	30
25s	WACGXX-25s-X	M25sx1,5	3/4"	PG21s	19,9	14	22	1,25	1,60	15	38
25	WACGXX-25-X	M25x1,5	3/4"	PG21	19,9	18,2	26,2	1,25	1,60	15	38
32	WACGXX-32-X	M32x1,5	1"	PG29	26,2	23,7	33,9	1,6	2,0	15	45
40	WACGXX-40-X	M40x1,5	1 1/4"	PG36s	33,9	27,9	40,4	1,6	2,0	15	55
50s	WACGXX-50s-X	M50sx1,5	1 1/2"	PG36	38,1	35,2	46,7	2,0	2,5	15	60
50	WACGXX-50-X	M50x1,5	2"	PG42	44,0	40,4	53,1	2,0	2,5	15	70
63s	WACGXX-63s-X	M63sx1,5	2"	PG48	49,9	45,6	59,4	2,0	2,5	15	75
63	WACGXX-63-X	M63x1,5	2 1/2"	-	55,9	54,6	65,9	2,0	2,5	15	80
75s	WACGXX-75s-X	M75sx1,5	2 1/2"	-	61,9	59	72,1	2,0	2,5	15	90
75	WACGXX-75-X	M75x1,5	3"	-	67,9	66,7	78,5	2,5	3,0	15	100
90	WACGXX-90-X	M90x2	3 1/2"	-	79,9	76,2	90,4	3,0	3,5	24	115
100	WACGXX-100-X	M100x2	-	-	90	86,1	101,5	3,15	4,0	24	123
115	WACGXX-115-X	M115x2	-	-	97,9	101,5	110,3	3,15	4,0	24	133
130	WACGXX-130-X	M130x2	-	-	114,9	114,2	123,3	3,15	4,0	24	152