


TACFLEX PA6 CONDUIT GLANDS WITH CABLE HOLDER



tacflex

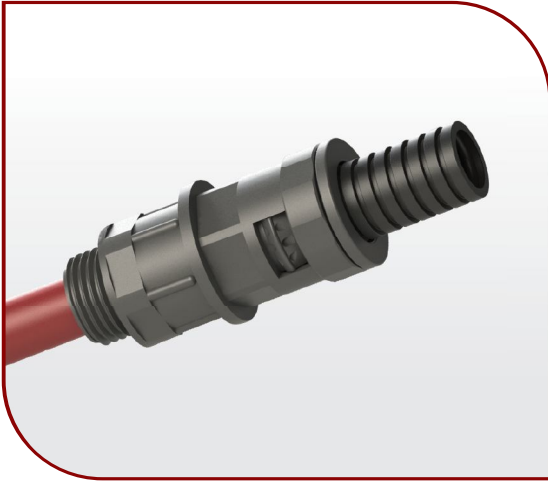


POLYAMIDE CONDUIT GLANDS WITH CABLE HOLDER

TECHNICAL DETAILS

Material : Polyamide PA6 V2
 Certificates : ROHS, CE, PT, TUV
 Connection thread : Metric (EN 60423)/PG (DIN 40430)
 Color : Black (RAL9005)
 Temperature range : -40 °C + 120 °C
 Protection class : IP54

Properties

UV resistance (black)
 Easy to assemble
 Halogen free
 Apply with either PA or PP type conduits



KABLO TUTUCULU GEÇMELİ TİP SİRAL BORU RAKORU

Hammaddesi : Polyamid
 Renk : RAL 9005 (Siyah)
 Bağlantı dişi M : EN 60423
 Bağlantı dişi PG : DIN 40430
 Çalışma sıcaklığı : -40 °C + 120 °C

PG/METRIC CONDUIT GLANDS

PRODUCT RANGE OVERVIEW

AG mm.	Black Code ■ RAL 9005	Spiral Diameter mm.	GL mm.	mm.	mm.
M 12 x 1,5	ODBR10-M12	6,5 x 10	8	15	3,5 - 6
M 12 x 1,5	ODBR12-M12	8,5 x 12	8	15	3,5 - 6
M 16K x 1,5	ODBR13-M16K	10 x 13	8	19	4,5 - 7
M 16K x 1,5	ODBR15-M16K	12 x 15,8	8	19	4,5 - 7
M 16K x 1,5	ODBR18-M16K	14,2 x 18,4	8	19	4,5 - 7
M 16 x 1,5	ODBR13-M16	10 x 13	8	22	6 - 9
M 16 x 1,5	ODBR15-M16	12 x 15,8	8	22	6 - 9
M 16 x 1,5	ODBR18-M16	14,2 x 18,4	8	22	6 - 9
M 20K x 1,5	ODBR13-M20K	10 x 13	9	24	9 - 12
M 20K x 1,5	ODBR15-M20K	12 x 15,8	9	24	9 - 12
M 20K x 1,5	ODBR18-M20K	14,2 x 18,4	9	24	9 - 12
M 20K x 1,5	ODBR21-M20K	16,5 x 21,2	9	24	9 - 12
M 20 x 1,5	ODBR21-M20	16,5 x 21,2	10	27	11 - 14
M 25 x 1,5	ODBR28-M25	23 x 28,4	11	33	14 - 18
PG 7	ODBR10-PG7	6,5 x 10	8	15	3,5 - 6
PG 7	ODBR12-PG7	8,5 x 12	8	15	3,5 - 6
PG 9	ODBR13-PG9	10 x 13	8	19	4,5 - 7
PG 9	ODBR15-PG9	12 x 15,8	8	19	4,5 - 7
PG 9	ODBR13-PG11	14,2 x 18,4	8	19	4,5 - 7
PG 11	OBGR15-PG11	10 x 13	8	22	6 - 9
PG 11	ODBR18-PG11	12 x 15,8	8	22	6 - 9
PG 11	ODBR13-PG13,5	14,2 x 18,4	8	22	6 - 9
PG 13,5	ODBR15-PG13,5	10 x 13	9	24	9 - 12
PG 13,5	ODBR18-PG13,5	12 x 15,8	9	24	9 - 12
PG 13,5	ODBR21-PG13,5	14,2 x 18,4	9	24	9 - 12
PG 13,5	ODBR21-PG16	16,5 x 21,2	9	24	9 - 12
PG 16	ODBR28-PG21	16,5 x 21,2	10	27	11 - 14
PG 21	ODBR34-PG29	23 x 28,4	11	33	14 - 18
PG 29	ODBR42-PG36	29 x 34,5	11	42	18 - 25
PG 36		36 x 42,5	13	53	25 - 32

Halogen free