


TACFLEX PP SPIRAL - SPLIT TYPE

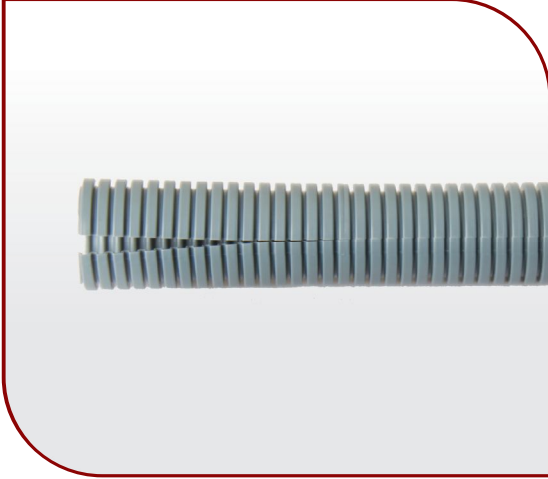


PLASTIC SPIRAL CONDUITS PP / SPLIT TYPE

TECHNICAL DETAILS

Material	: Polypropylene
Certificates	: ROHS, CE, PT, TUV
Color	: Gray (RAL7031) Black (RAL9005) * Orange or any other color versions are available on request
Temperature range	: -20 °C + 90 °C

Properties

Slit version
Self-extinguishing
Full-shrink packing
Acid resistance



PP YARIKLI TİP SİRİAL BORU

Hammaddesi	: Polipropilen
Renk	: RAL 7031 (Gri) RAL 9005 (Siyah)
Çalışma sıcaklığı	: -20 °C + 90 °C
Kullanım alanları	: Mekanik ve ekipman cihaz bağlantılarında makine, matbaa, otomotiv, lokomotif, tramvay, gemi otomatik makineleri, endüstriyel tesis montajlarında, aydınlatma ve elektrik pano montajlarında kullanılmaktadır.

SPLIT TYPE PP SPIRAL CONDUITS

Nominal Diameter	Gray Code	Black Code	d	d1	Roll Length mt.
	■ RAL 7031	■ RAL 9005	Ø mm.	Ø mm.	
7	OGPPY 7	OSPPY 7	6,5	10	100
8,5	OGPPY 8,5	OSPPY 8,5	8,5	12	100
9	OGPPY 9	OSPPY 9	10	13	100
11	OGPPY 11	OSPPY 11	12	15,8	50
13,5	OGPPY 13,5	OSPPY 13,5	14,2	18,4	50
16	OGPPY 16	OSPPY 16	16,5	21,2	50
21	OGPPY 21	OSPPY 21	23,5	28,4	50
22	OGPPY 22	OSPPY 22	22	27,5	50
29	OGPPY 29	OSPPY 29	29	34,5	25
36	OGPPY 36	OSPPY 36	36	42,5	25
48	OGPPY 48	OSPPY 48	48	54,5	25

PRODUCT RANGE OVERVIEW