


ORTAC PLASTIC ACCESSORIES SERIES

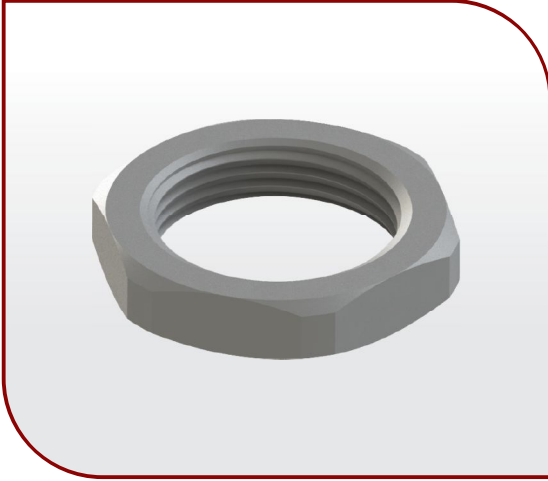

## POLYAMIDE LOCK NUTS STANDARD TYPE


### TECHNICAL DETAILS

#### Material

Hexagonal lock nut : Polyamide PA6 V2 + 30% GF  
 Connection thread : Metric (EN 60423)/PG (DIN 40430)  
 Certificates : ROHS,CE,PT,TUV  
 Temperature range : -20 °C + 100 °C  
 : -30 °C + 150 °C (short term)

#### Properties

For tightening of cable glands  
 UV resistance  
 Halogen free



### SOMUN

Hammaddesi : Polyamid PA6 V2  
 Renk : RAL 7001 (Gri)  
 : RAL 7035 (Açık Gri)  
 : RAL 9005 (Siyah)  
 Bağlantı dişi M : EN 60423  
 Bağlantı dişi PG : DIN 40430  
 Sürekli ısıya direnci : -20 °C + 100 °C  
 Kısa süreli ısıya direnci : -30 °C + 150 °C



■ RAL 7001



■ RAL 7035



■ RAL 9005

### METRIC/PG THREAD LOCK NUTS

AG Thread	Gray Code ■ RAL 7001	L. Gray Code ■ RAL 7035	Black Code ■ RAL 9005	H mm	mm
M 12 x 1,5	MSG 01	MSL 01	MSB 01	5	18
M 16 x 1,5	MSG 02	MSL 02	MSB 02	5	22
M 20 x 1,5	MSG 03	MSL 03	MSB 03	6	26
M 25 x 1,5	MSG 04	MSL 04	MSB 04	6	32
M 32 x 1,5	MSG 05	MSL 05	MSB 05	7	41
M 40 x 1,5	MSG 06	MSL 06	MSB 06	7	50
M 50 x 1,5	MSG 07	MSL 07	MSB 07	8	60
M 63 x 1,5	MSG 08	MSL 08	MSB 08	8	75
PG 7	OSG 01	OSL 01	OSB 01	5	19
PG 9	OSG 02A	OSL 02A	OSB 02A	5	19
PG 9	OSG 02	OSL 02	OSB 02	5	22
PG 11	OSG 03	OSL 03	OSB 03	5	24
PG 13,5	OSG 04	OSL 04	OSB 04	6	27
PG 16	OSG 05	OSL 05	OSB 05	6	30
PG 21	OSG 06	OSL 06	OSB 06	7	36
PG 29	OSG 07	OSL 07	OSB 07	7	46
PG 36	OSG 08	OSL 08	OSB 08	8	60
PG 42	OSG 09	OSL 09	OSB 09	8	65
PG 48	OSG 10	OSL 10	OSB 10	8	70

PRODUCT RANGE OVERVIEW

Halogen free