


STex SPIRAL TYPE CABLE GLANDS

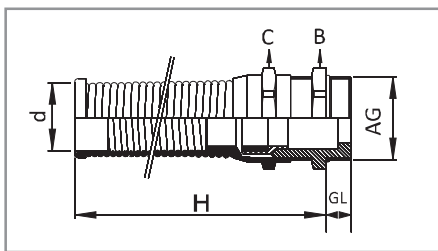

UNARMoured CABLE GLANDS STEX SPIRAL TYPE

TECHNICAL DETAILS

- Type : STex spiral type cable gland
- Protection code : I M2 Ex db I Mb / I M2 Ex eb I Mb II 2G Ex db IIC Gb / II 2G Ex eb II Gb II 2D Ex tb III C Db
- Certificate : IEP 16 ATEX 0436X
ATEX, ROHS, CE, PT, TUV
- Material : MS58 Brass with or without nickel plated
Stainless steel (AISI303 / 316L / Aluminium)
- Spiral part : Stainless steel (1.4310/AISI302)
- Standards : EN 60079-0:2012, 60079-7:2007, 60079-1:2007
60079-31:2009
- Protection class : IP66 / 68
- Temperature : -30 °C +120 °C NBR
-40 °C +100 °C NEOPRENE
-60 °C +180 °C SILICONE
-30 °C +100 °C TPE/V
- Application area : ZONE1, ZONE2, ZONE21, ZONE22,
Gas Group IIA, IIB, IIC
- Cable type : Unarmoured

METRIC/PG THREAD CABLE GLANDS

Product Size	Code	Standard AG	Spiral Diameter (d)	H mm	Exd GL mm	Exe GL mm	B mm	C mm	Ø4 mm
12	STexXX-12-X	M 12 x 1,5	6,8	55	15	6	14	14	3 - 6,5
16	STexXX-16-X	M 16 x 1,5	8,2	66	15	7	18	17	4 - 8
20	STexXX-20-X	M 20 x 1,5	12,3	88	15	8	22	22	6 - 12
25	STexXX-25-X	M 25 x 1,5	14,3	98	15	8	27	24	10 - 14
32	STexXX-32-X	M 32 x 1,5	18,4	111	15	9	34	30	13 - 18
12	STexXX-12-X	PG 7	6,8	55	15	6	14	14	3 - 6,5
16	STexXX-16-X	PG 9	8,2	66	15	6	17	17	4 - 8
16	STexXX-16-X	PG 11	10,3	77	15	6	20	20	5 - 10
20	STexXX-20-X	PG 13,5	12,3	88	15	6,5	22	22	6 - 12
25	STexXX-25-X	PG 16	14,3	98	15	6,5	24	24	10 - 14
32	STexXX-32-X	PG 21	18,4	111	15	7	30	30	13 - 18
12	STexXX-12-X	NPT 1/4"	6,8	55	15	-	14	14	3 - 6,5
16	STexXX-16-X	NPT 3/8"	8,2	66	15	-	18	17	4 - 8
16	STexXX-16-X	NPT 1/2"	10,3	77	15	-	22	20	5 - 10
20	STexXX-20-X	NPT 1/2"	12,3	88	15	-	22	22	6 - 12
25	STexXX-25-X	NPT 3/4"	14,3	98	15	-	27	24	10 - 14
32	STexXX-32-X	NPT 1"	18,4	111	15	-	34	30	13 - 18
12	STexXX-12/X	G 1/4"	6,8	55	15	-	15	14	3 - 6,5
16	STexXX-16/X	G 3/8"	8,2	66	15	-	19	17	4 - 8
16	STexXX-16/X	G 3/8"	10,3	77	15	-	22	20	5 - 10
20	STexXX-20/X	G 1/2"	12,3	88	15	-	24	22	6 - 12
25	STexXX-25/X	G 3/4"	14,3	98	15	-	30	24	10 - 14
32	STexXX-32/X	G 1"	18,4	111	15	-	36	30	13 - 18

NPT & GAS THREAD

* Pls add "E" to the code if required Exe protection.

PRODUCT RANGE OVERVIEW

IP 68

Halogen free