


TACFLEX FLEXIBLE CONDUITS - Steel wire over braiding



tacflex

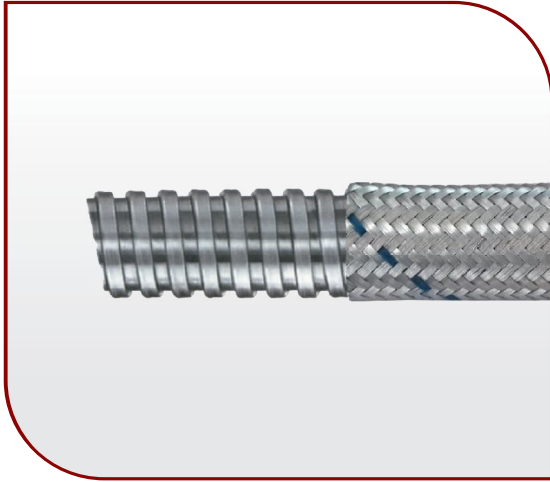


FLEXIBLE SPIRAL CONDUITS STEEL WIRE OVER BRAIDING

TECHNICAL DETAILS

Material : Galvanised steel galv. steel overbraided
 Certificates : ROHS, CE, PT, TUV
 * SS overbraided version is available on request
 Protection class : IP40
 Temperature range : -100 °C +300 °C

Properties

High impact strength
 Halogen free
 Low fire hazard
 Self-extinguishing
 High abrasion resistance
 EMC screening
 Full-shrink packing



ÇELİK TEL ÖRGÜLÜ METAL SİRİL BORULAR

Hammaddesi : Galvaniz & kalay kaplı sac
 Örgü kaplaması : Galvaniz / Paslanmaz çelik
 Sürekli ısıya direnci : -100 °C + 300 °C
 Emc screen özelliği

PRODUCT RANGE OVERVIEW

Code	Size	d mm.	d1 mm.	Roll Length mt.
CTS 9	1/4"	9	14	50
CTS 10	1/4"	10	15	50
CTS 11	3/8"	11	16	50
CTS 13	3/8"	13	17,5	50
CTS 16	1/2"	16	21	50
CTS 21	3/4"	21	26	50
CTS 26	1"	26	32	25
CTS 35	1 1/4"	35	41	25
CTS 40	1 1/2"	40	46	25
CTS 51	2"	51	57	25