


ORTAC METAL ACCESSORIES

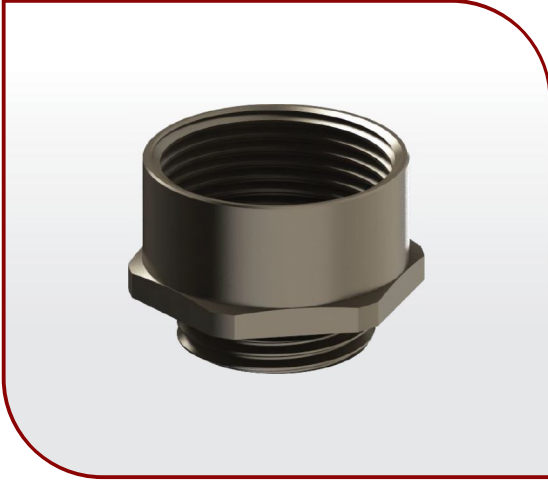

METAL ADAPTERS METRIC-PG / PG-METRIC BRASS


TECHNICAL DETAILS

Material

Adapter : Brass with nickel plated
O-ring : NBR
Connection thread : Metric (EN 60423) / PG (DIN40430)
Certificates : ROHS, CE, PT, TUV, TURK LOYDU
Protection class : IP68

Properties

Adapter from metric outer thread to PG inner thread
Enable to use of PG accessories in metric threads



PİRİNÇ ADAPTÖR

Hammaddesi : Pirinç, nikel kaplı
Bağlantı dişi M : EN 60423
Bağlantı dişi PG : DIN 40430
O-ring : Nitril kauçuk

METRIC/PG THREAD ADAPTERS

AG Thread	Code	IG mm	GL mm	mm
M 12 x 1,5	M12AP7	PG 7	6	14
M 12 x 1,5	M12AP9	PG 9	6	17
M 16 x 1,5	M16AP11	PG 11	6	21
M 20 x 1,5	M20AP11	PG 11	6	22
M 20 x 1,5	M20AP13,5	PG 13,5	6	23
M 25 x 1,5	M25AP16	PG 16	7	27
M 25 x 1,5	M25AP21	PG 21	7	32
M 32 x 1,5	M32AP29	PG 29	8	42
M 40 x 1,5	M40AP29	PG 29	8	45
M 50 x 1,5	M50AP36	PG 36	10	55
M 50 x 1,5	M50AP42	PG 42	10	60
M 63 x 1,5	M63AP48	PG 48	10	65
PG 7	P7AM12	M 12 x 1,5	6	14
PG 9	P9AM16	M 16 x 1,5	6	19
PG 11	P11AM16	M 16 x 1,5	6	21
PG 13,5	P13,5AM20	M 20 x 1,5	6	23
PG 16	P16AM20	M 20 x 1,5	7	25
PG 16	P16AM25	M 25 x 1,5	7	28
PG 21	P21AM25	M 25 x 1,5	7	30
PG 21	P21AM32	M 32 x 1,5	7	35
PG 29	P29AM40	M 40 x 1,5	8	45
PG 36	P36AM50	M 50 x 1,5	9	55
PG 42	P42AM63	M 63 x 1,5	10	70

PRODUCT RANGE OVERVIEW