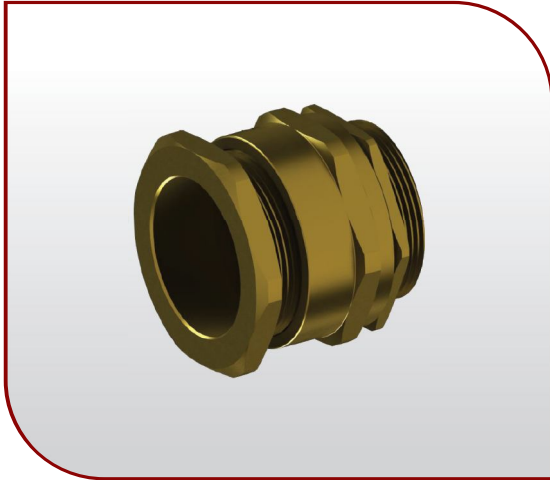
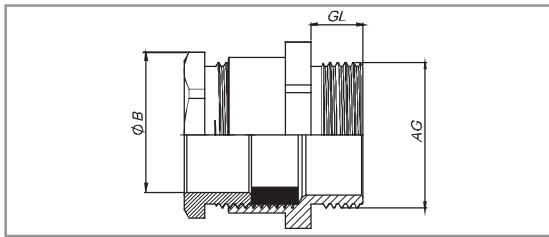


A2 UNARMoured GABLE GLANDS

BS 6121 INDUSTRIAL TYPE GLANDS

**UNARMoured CABLE GLANDS
A2 SERIES**
TECHNICAL DETAILS

Type	: A2 (Single compression gland)
Certificates	: ROHS, CE, PT, TUV
Material	: Brass with or without nickel plated
Standards	: BS 6121
Protection class	: IP66 & 68
Temperature	: -20 °C +80 °C:
Thread options	: Metric , NPT , BSP & PG
Application	: For indoor or outdoor use with all types of unarmoured cables
Accessories	: Matches accessories available like PVC Shrouds locknuts & earth tag
Function	: A2 type glands provide a single pulling resistant seal on the outer sheath of unarmoured cable.


PRODUCT RANGE OVERVIEW

Product Size	Product Code	Standard AG	AG NPT	B		GL mm
				Min	Max	
20s	A2-M20s	M20 x 1,5	1/2"	8	11,5	10
20L	A2-M20L	M20 x 1,5	1/2"	11	13,5	10
25s	A2-M25s	M25 x 1,5	3/4"	13	16,5	10
25L	A2-M25L	M25 x 1,5	3/4"	16	19,5	10
32L	A2-M32L	M32 x 1,5	1"	19	25,5	10
40s	A2-M40s	M40 x 1,5	1 1/4"	23	29	15
40L	A2-M40L	M40 x 1,5	1 1/4"	25	32	15
50s	A2-M50s	M50 x 1,5	1 1/2"	31,5	37	15
50L	A2-M50L	M50 x 1,5	2"	36,5	43	15
63s	A2-M63s	M63 x 1,5	2"	42,5	50	15
63L	A2-M63L	M63 x 1,5	2 1/2"	49,5	55	15
75s	A2-M75s	M75 x 1,5	2 1/2"	54,5	61	15
75L	A2-M75L	M75 x 1,5	3"	60,5	67	15
90	A2-M90	M90 x 2	3"	65	78	20